Dead end - Arcus thread+fem.adj

Outside of post - Outside of post

X

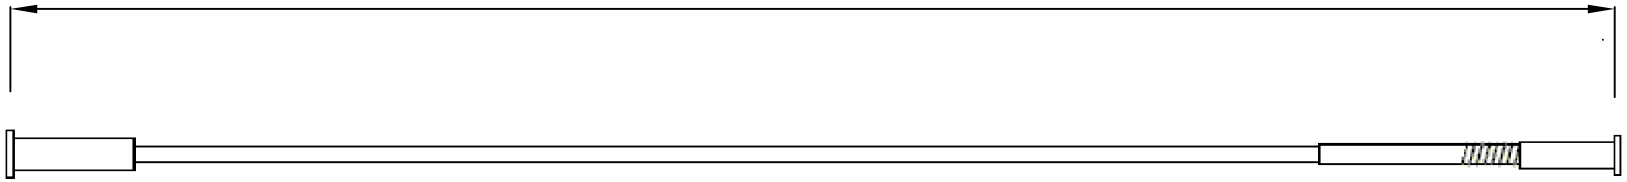

Part no: _____ Part no: _____

Qty of Cables	Length =X

		Customer		Customer sign.		General Tolerance	
						>0.5 ....6 mm	± 0.1
						> 6 ... 30 mm	± 0.2
						>30 ...120 mm	± 0.3
						>120 ..400 mm	± 0.5
Wire diameter							
Wire construction		Material		DRAWING BY	CHECKED BY	APPROVED BY	Scale / Standard Tolerance: C / DIN.
Pin Diameter		Date		.....	.....	...../...../.....	UNIT OF MM

ARCUS WIRE GROUP
MARINE • INDUSTRIAL • ARCHITECTURAL